

Riding Lawn Tractors

X500 SERIES | X300 SERIES | S240 SPORT | 100 SERIES



Great lawn care starts here.



Quite simply, some of the finest lawn tractors made today.

Lawn care is a passion. We build John Deere Lawn Tractors the right way because we care too. That's just how we run.

You can see the results for yourself on pages 4 and 6 with our Accel Deep™ Mower Decks, available on our Select Series tractors.

On page 8 learn about the S240 Sport. With its premium, 42-in. Edge™ Cutting System and deluxe ventilated seat, you can maintain your yard at the highest levels in comfort — all for a surprisingly low price.

Then there are the D100 Series Lawn Tractors on page 10. All in all, you'll find value and a lawn tractor that's built right from the start.

No matter where you look, page after page, you'll see dedication to a premium cut. Talk to your local John Deere Dealer. Or visit JohnDeere.com/LawnTractors or JohnDeere.CA/LawnTractors today.



The Accel Deep™ mower deck.
Dozens of prototypes discarded. Hundreds of hours of simulations and real world testing. This is how to mow well fast.

Four-wheel steering.
Designed for ultimate trimmability. All four wheels steer the tractor instead of just the front two. Available on Select Series models.

Table of contents

X500 Series Garden Tractors.....	4
X300 Series Lawn Tractors.....	6
S240 Sport Lawn Tractor	8
D100 Series Lawn Tractors.....	10
Specifications.....	12
Attachments.....	15



Four-Wheel Steer. All four wheels turn in unison around obstacles for extra tight turns. (Available on the X354, X384, X394 and X584 Select Series.)




Twin Touch System. Twin Touch™ automatic transmission lets you easily change from forward to reverse with two-pedal foot control for effortless speed and direction changes. (Available on the X300 and X500 Series.)



Cutting Height Adjuster. Cutting height can be adjusted in 1/4 in. increments for a precise, even cut. (Shown here on the D100 Series.)

A heavy-duty robotically welded frame. The bedrock of these machines. So solid, it can handle an amazing variety of heavy-duty attachments. (X500 frame pictured)

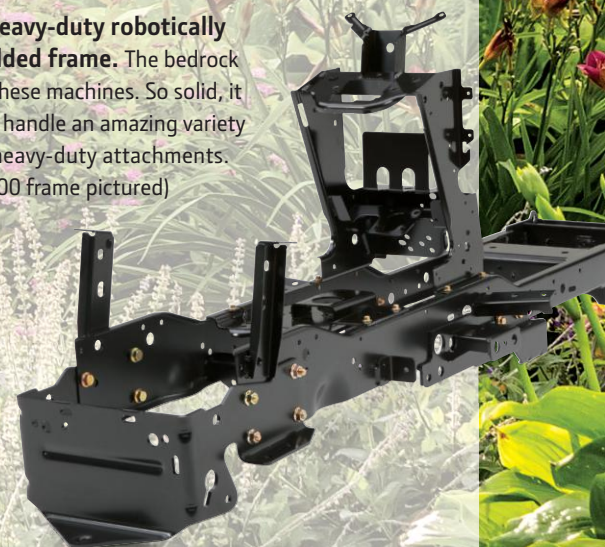

Mulch Control.™ Mulch on. Mulch off. Mulch the easy way--with the flip of a lever. Available with Accel Deep™ Mower Decks on Select Series Tractors.



Lawn care at the cellular level.

The John Deere MowerPlus app keeps your John Deere riding lawn equipment running well and your lawn looking great. Track and record yard tasks and access seasonal care tips. #MustHaveMowerPlus. Available at the App Store® or Google Play™** store. US only.

*The App Store® is a service mark of Apple Inc., registered in the U.S. and other countries. Google Play™ store is a third party trademark used with permission.

Select Series X500

The top of the line.
All yours.

Four-wheel steering.

Designed for ultimate trimmability. All four wheels steer the tractor instead of just the front two.

Hydraulic Power Steering

Hydraulic power steering makes 4-wheel steering even easier and provides excellent maneuverability and a 12-inch uncut circle radius.



The quality cut is just the beginning.

Mow with precision. Negotiate an incline. Till a garden.

X500s mow where you need to go, and do heavy-duty work, too. Their wide stance enhances stability on hillsides. Traction can be increased simply by pressing the foot-operated traction control. Heavy-duty frames work with ground-engaging equipment like tillers. And features like the on-board deck-leveling gauge assure a quality cut every time.

Multi-Terrain. Multi-talented:
The X500 Series.

iTorque Power System

All X500 Series Tractors feature iTorque Power System engines that provide plenty of power and torque for excellent performance in any operating condition.



Accel Deep™ Mower Decks

Designed to mow fast well, the deeper “draw” and flat top design create a better quality of cut at faster ground speeds.



Easy-To-Read Display

Helps you see what’s “what” including a tachometer with best cut target zone. It displays engine speed and target zone for the best cut quality.



Traction Assist

A traction assist control locks the rear transaxle, so both rear wheels work together with maximum traction. It’s an exceptionally effective method to negotiate muddy ground, or to climb a hill.



Deluxe, 21-inch highback seat

Deluxe, 21-inch highback seat with spring suspension provides a smooth, comfortable ride on uneven terrain (X584 and X590.)



Rotary Tiller

Create a great start for your flower bed or garden.

BUMPER-TO-BUMPER
4-YEAR /500-HOUR
WARRANTY

Select Series X300

Get around.
Everything.

Four-wheel steering.

Designed for ultimate trimmability. All four wheels steer the tractor instead of just the front two.

Accel Deep™ Mower Decks.

Designed to mow fast well, the deeper "draw" and flat top design create a better quality of cut at faster ground speeds.

The grass is always greener around here.

Enjoy effortless steering and speed control. The X300 Series delivers all this (and more) with available four-wheel steering, and easy-to-operate Twin Touch™ foot pedals. A combination you won't find anywhere else in the industry.

Take the X370, X390 and X394. Along with a 15-inch open-back seat, all feature power steering for precision turns and are equipped with power-lift for handling heavy attachments with ease. The real power comes from the 18.5-hp* (13.8 kW) and 22-hp* (16.4 kW), iTorque™ Power Systems. The responsiveness from the Twin Touch™ foot pedals for pinpoint control forward or reverse.

So if you are looking for an easier way to get around everything in your yard, look no further.

BUMPER-TO-BUMPER
4-YEAR / 300-HOUR
WARRANTY**

Twin Touch System

Twin Touch™ automatic transmission lets you easily change from forward to reverse with two-pedal foot control for effortless speed and direction changes.



Rear Collection

For the cleanest looking lawns, choose either a bagger attachment or the custom-engineered X350R dedicated rear-bagging tractor. The X350R includes both the rear hopper and the mulch plug as standard equipment.



Easy-To-Read Display

Includes an electronic fuel gauge that provides real-time fuel level information. There's even a tachometer with best cut target zone.

Exact Adjust Deck Leveling System

This exclusive feature allows you to conveniently level the deck from just below the seat.



S240 SPORT

Everything's premium.
Except the price.

This is what premium is all about.

Every epic touch football game, baseball catch, Frisbee toss deserves no less. With two-pedal forward/reverse foot controls, a precision, premium quality 42-in. Edge™ Cutting System cut and a cast-iron front axle for durability, the cut of your lawn will be the envy of the neighborhood. All for a surprisingly low price.



BUMPER-TO-BUMPER
3-YEAR / 200-HOUR
WARRANTY**



From baggers that clean up clippings to sweepers that clear yard debris to a cart that can carry around mulch and seed, S240 attachments help you get things done.



Comfortable, open-back seat to capture breezes, keeping you cool.



Large, turf-friendly tires for a smooth ride and easy turns.



Powerful, smooth running 18.5-hp* V-twin engine. The kind you find in our Select Series models.

Series
100

Feels Right. Built Right.



BUMPER-TO-BUMPER
2-YEAR / 120-HOUR
WARRANTY

Just right for your yard.

Built in Greeneville, TN., we make sure your 100 Series Tractor is made right. Start with the stamped deck design. It completely lifts grass for a precise, even cut. Choosing your optimal mowing height is also easy with our ¼-inch height of cut adjustment settings. You can even switch between mulching, bagging and side-discharging with our 3-in-1 Edge™ Cutting System.

Then there's legendary John Deere durability. You'll get a solid, one-piece, 12-gauge frame that's robotically welded to provide maximum strength. The durable features don't stop there: heavy-duty crankshafts, a cast-iron front axle, and a high-quality engine are proof 100 Series Tractors are tough and made right from the start. That's how we run. Nothing Runs Like a Deere.™



Electric PTO, available on some models, provides instant engagement of mower blades. Ignition switch and single lever throttle/choke are on the dash within easy reach.



Deluxe double-bar front bumper comes standard on the D130, D155, D160 and D170.



The mower decks are stamped out of high grade steel with a rounded design to leave no corner or edge for grass to get stuck in. This helps the cut grass to travel easily through the deck and supports an even dispersal for a quality cut.



Heat-resistant, comfortable seat provides 5.5 inches of seat travel, giving plenty of room for every-sized operator. Move up the line and you'll discover features like a deluxe high-back seat and lumbar adjustment. (Available on D155, D160, and D170 Lawn Tractors.)



Extended Life Series Engine in the D155, D160 and D170 features increased fuel and air filtering capacities.



Car like cruise control. Choose your mowing speed, lift the lever, take your foot off the gas and enjoy the ride. Available on the D125, D130, D140, D155, D160 and D170.



[†]Built with foreign and domestic parts.

X500 Series

X300 Series

Specifications

	X570 / X580	X584 / X590
Engine		
Model Number	FS730 V iTorque Power System	FS730 V iTorque Power System / FS730V-EFI iTorque Power System
Engine Power	24 hp* (17.9 kW)	24 hp* (17.9 kW) / 2 5.5 hp* (19.0 kW)
Displacement	44.3 cu in. (726 cc)	44.3 cu in. (726 cc)
Cooling	Air	Air
Governor	Mechanical	Mechanical/Constant-speed electronic
Cylinder Configuration	V-twin	V-twin
Electrical System	12 volts, 15 amp regulated	12 volts, 15 amp regulated
Dash display:		
Fuel Gauge	Yes	Yes
Fuel System:		
Fuel Tank Capacity	4.4 U.S. gal. (16.7 L)	4.4 U.S. gal. (16.7 L)
Transmission:		
Forward Speed	0-7.2 mph (0-11.6 km/h)	0-7.2 mph (0-11.6 km/h)
Reverse Speed	0-5.2 mph (0-8.4 km/h)	0-5.2 mph (0-8.4 km/h)
Steering:		
Tilt Wheel	No	Yes, 5 position
Front Axle	Cast iron	Cast iron
Turning Radius:		
	16 in. (40.6 cm)/22-in. (55.9 cm)	19 in. (48.3 cm)/22-in. (55.9 cm)
Uncut circle radius:		
	23 in. (58 cm) w/48A Mower or 20 in. (51 cm) w/54A Mower / 24 in. (61 cm) w/54A Mower	15 in. (38 cm) w/48A Mower or 12 in. (30 cm) w/54A Mower / 27 in. (69 cm) w/48A Mower or 24 in. (61 cm) w/54A Mower
Seat:		
Style	15 in. (38.1 cm) high-back with grasp	21 in. (53.3 cm) high-back
Lift system:		
Type	Foot pedal with adjustable spring assist/ Hydraulic	Hydraulic
Tires:		
Type	Turf/Turf, Heavy-Duty All-Purpose (rear only)	Turf/Heavy-Duty All-Purpose (rear only) w/54 in. A
Front	15x6.5-8 turf / 16x6.5-8 turf	16x6.5-8 turf
Rear	24x12-12 turf/24x12-12 HDAP	24x9.5-12 turf/24x12-12 HDAP w/54 in. A
Dimensions:		
Wheelbase	51.2 in. (130 cm)	51.2 in. (130 cm)
Overall Length	75 in. (191 cm) / 79 in. (201 cm)	79 in. (201 cm) / 79 in. (201 cm)
Min. Storage Width (Deflector Up)	53.6 in. (136 cm) w/ 48 in. Accel Deep or 59.4 in. (151 cm) w/ 54 in. Accel Deep	53.6 in. (136 cm) w/48 in. Accel Deep or 59.4 in. (151 cm) w/54 in. Accel Deep
Weight, Tractor (no fuel) and Mower	748 lb (339 kg) w 48 in. Accel Deep, 756 lb (343 kg) w/ 54 in. Accel Deep/ 787 lb (357 kg) w 54 in. Accel Deep	837 lb (380 kg) w/48 in. Accel Deep or 845 lb (383 kg) w/54-in. Accel Deep / 797 lb (362 kg) w/48-in. Accel Deep or 805 lb (365 kg) w/54-in. Accel Deep
Mower Deck Options		
	48 in. Accel Deep™ or 54 in. Accel Deep/ 54 in. Accel Deep	48 in. Accel Deep or 54 in. Accel Deep
Cutting Width /Blades	48 in. (122 cm) 3 blades or 54 in. (137 cm) 3 blades/54 in. (137 cm) 3 blades	48 in. (122 cm) 3 blades or 54 in. (137 cm) 3 blades
Bumper-to-Bumper Warranty**		
	4 year/500 hours	4 year/500 hours

X330 / X350
44J6 Cyclonic / FS600V iTorque Power System
20 hp** (14.9 kW)/18.5 hp* (13.8 kW)
44.2 cu in. (724 cc)/36.8 cu in. (603 cc)
Air
Mechanical
V-twin
12 volts, 14 amp regulated/ 12 volts, 15 amp regulated
Yes
3.3 U.S. gal. (12.5 L)
0-5.5 mph (0-8.9 km/h)
0-4 mph (0-6.4 km/h)
Low effort, 2-wheel steer
No
Cast iron
16 in. (40.6 cm)
26 in. (66 cm) w/42A Mower or 21 in. (53 cm) w/48A Mower
15 in. (381 mm) open-back
Foot pedal/Foot pedal with spring assist (48A Mower)
Turf
15x6-6
20x10-8
49.4 in. (125 cm)
72 in. (183 cm)
50.5 in. (128 cm) w/42 in. Accel Deep Mower or 53.6 in. (136 cm) w/48 in. Accel Deep Mower
542 lb (246 kg) w/ 42 in. mower/607 lb (275 kg) w/ 48 in. mower
42 in. Accel Deep/ 42 in. Accel Deep or 42 in. Mulch option or 48 in. Accel Deep
42 in. (107 cm) 2 blades/ 42 in. (107 cm) 2 blades or 48 in. (122 cm) 3 blades
4 year/300 hours

†Turf optional

* The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's web site for additional information.

** Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or www.JohnDeere.ca/TUWarranty for details.

^ Customer may return qualifying purchase to the selling dealer for repair, exchange or refund. Applicable only to products used in consumer applications. Additional conditions apply. See participating dealer for details.

S240 SPORT

X354 (4WS) / X370

FS600V iTorque Power System
18.5 hp* (13.8 kW)
36.8 cu in. (603 cc)
Air
Mechanical
V-twin
12 volts, 15 amp regulated

Yes

3.3 U.S. gal. (12.5 L)

0-5.5 mph (0-8.9 km/h)/0-5.8 mph (0-9.3 km/h)

0-4 mph (0-6.4 km/h)/ 0-3.5 mph (0-5.6 km/h)

Low effort, 4-wheel steer/ Power, 2-wheel steer

No

Cast iron

15 in. (38.1 cm)/ 22-in. (55.9 cm)

15 in. (38 cm) w/42A Mower or 30 in. (76 cm) w/42A Mower

15 in. (381 mm) open-back

Foot pedal/ Hydraulic

Turf

15x6-6

20x10-10/ 20X10-8

49.4 in. (125 cm)

72 in. (183 cm)

50.5 in. (128 cm) w/42 Accel Deep Mower

623 lb (283 kg) w/ 42 in. mower/
570 lb (259 kg) w/ 42 in. mower

42 in. Accel Deep

42 in. (107 cm) 2 blades

4 year/300 hours

X380

FS651V iTorque Power System
22 hp* (16.4 kW)
44.3 cu in. (726 cc)
Air
Mechanical
V-twin
12 volts, 15 amp regulated

Yes

3.3 U.S. gal. (12.5 L)

0-6.2 mph (0-10 km/h)

0-3.5 mph (0-5.6 km/h)

Low effort, 2-wheel steer

No

Cast iron

16 in. (40.6 cm)

21 in. (53 cm) w/48A Mower or
18 in. (46 cm) w/54A Mower

15 in. (381 mm) open-back

Foot pedal with spring assist

Turf

15x6.5-8

22x11-10

49.4 in. (125 cm)

72-in. (183 cm)

53.6 in. (136 cm) w/48 in. Accel Deep Mower
or 59.4 in. (151 cm) w/54 in. Accel Deep
Mower

651 lb (295 kg) w/ 48 in. mower
or 659 lb (299 kg) w/ 54 in. mower

48 in. Accel Deep or 54 in. Accel Deep

48 in. (122 cm) 3 blades or 54 in. (137 cm)
3 blades

4 year/300 hours

X384 (4WS) / X390 / X394

FS651V iTorque Power System
22 hp* (16.4 kW)
44.3 cu in. (726 cc)
Air
Mechanical
V-twin
12 volts, 15 amp regulated

Yes

3.3 U.S. gal. (12.5 L)

0-5.9 mph (0-9.5 km/h)/ 0-6.2 mph (0-10.0 km/h) /
0-6.2 mph (0-10.0 km/h)

0-3.5 mph (0-5.6 km/h)

Low effort, 4-wheel steer/ Power, 2 wheel steer/
Power, 4-wheel steer

No/Yes/Yes

Cast iron

15 in. (38.1 cm)/ 22-in. (55.9 cm) / 19-in. (48.3 cm)

9 in. (23 cm) w/48A Mower / 24 in. (61 cm)
w/48A Mower or 22 in. (56 cm) w/54A Mower /
15 in. (38 cm) w/48A Mower

15 in. (381 mm) open-back

Foot pedal with spring assist/ Hydraulic/
Hydraulic

Turf

15x6-6/ 15x6.5-8/ 15x6.5-8

20x10-10/ 22x11-10/ 22x9.5-12

49.4 in. (125 cm)

72-in. (183 cm) / 72-in. (183 cm) / 74-in. (188 cm)

53.6 in. (136 cm) w/48 in. Accel Deep Mower / 53.6 in. (136 cm)
w/48 in. Accel Deep Mower or 59.4 in. (151 cm) w/54 in. Accel Deep
Mower / 53.6 in. (136 cm) w/48 in. Accel Deep Mower

700 lb (318 kg) w/48 in. mower/ 678 lb (308 kg) w/48 in. mower or
686 lb (311 kg) w/54 in. mower/ 755 lb (342 kg) w/48 in. mower

48 in. Accel Deep/ 48 in. Accel Deep or 54 in. Accel Deep/ 48 in.
Accel Deep

48 in. (122 cm) 3 blades/ 48 in. (122 cm) 3 blades or 54 in. (137 cm)
3 blades/ 48 in. (122 cm) 3 blades

4 year/300 hours

X350R

FS600V iTorque Power System
18.5 hp* (13.8 kW)
36.8 cu in. (603 cc)
Air
Mechanical
V-twin
12 volts, 15 amp regulated

Low fuel indicator

2 U.S. gal. (7.6 L)

0-5.3 mph (0-8.5 km/h)

0-4 mph (0-6.4 km/h)

Low effort, 2-wheel steer

No

Cast iron

16.5 in. (42 cm)

Right 23 in. (58 cm), Left 28 in. (71 cm)
with 42R Mower

15 in. (381 mm) open-back

Foot pedal with spring assist

Turf

15x6-6

20x10-8

49.4 in. (125 cm)

99-in. (251.4 cm)

43.8 in. (111 cm) with 42 in. rear
discharge, rear collect mower

646 lb (293 kg) w/42 in. mower

42 in. rear discharge and collect
with standard mulch plug

42 in. (107 cm) 2 blades

4 year/300 hours

S240

FS600V iTorque Power System
18.5 hp* (13.8 kW)
36.8 cu in. (603 cc)
Air
Mechanical
V-twin
12 volts, 15 amp regulated

No

2.4 U.S. gal. (9.1 L)

0-5.5 mph (0-8.9 km/h)

0-3.2 mph (0-5.1 km/h)

Low effort, 2-wheel steer

Yes, mechanical

Cast iron

18 in. (45 cm)

25 in. (64 cm) w/42 Edge Mower

15 in. (381 mm) open-back

Hand lever

Turf

15x6-6

20x10-8

48.9 in. (122.7 cm)

75 in. (191 cm)

44.8 in. (114 cm) w/42-in. mower

458 lb (208 kg) w/42 in. mower

42 in. Edge Mower

42 in. (107 cm) 2 blades

3 year/200 hours

Specifications D100 Series

†Turf optional

* The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. Refer to the engine manufacturer's web site for additional information.

** Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com or www.JohnDeere.ca/TUWarranty for details.

Δ Customer may return qualifying purchase to the selling dealer for repair, exchange or refund. Applicable only to products used in consumer applications. Additional conditions apply. See participating dealer for details.

	D105	D110	D125 / D130	D140	D155	D160	D170
Engine							
Horsepower*	17.5 hp (13.0 kW)	19.0 hp (14.2 kW)	20 hp (14.9 kW)/ 22 hp (16.4 kW)	22 hp (16.4 kW)	24 hp (17.9 kW)	25 hp (18.6 kW)	25 hp (18.6 kW)
Cylinders	One	One	V-twin	V-twin	V-twin ELS	V-twin ELS	V-twin ELS
Displacement	30.5 cu in. (500 cc)	33 cu in. (540 cc)	40 cu in. (656 cc)/ 44 cu in. (724 cc)	44 cu in. (724 cc)	44 cu in. (724 cc)	44 cu in. (724 cc)	44 cu in. (724 cc)
Oil Filter	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Air Filter	Cartridge	Cartridge	Cartridge	Cartridge	Cartridge with prefilter	Cartridge with prefilter	Cartridge with prefilter
Mower Deck							
Cut Width	42 in. (107 cm)	42 in. (107 cm)	42 in. (107 cm)/ 42 in. (107 cm)	48 in. (122 cm)	48 in. (122 cm)	48 in. (122 cm)	54 in. (137 cm)
Cutting Blades	Two	Two	Two	Three	Three	Three	Three
Cut Height	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)	1 to 4 in. (25.4 to 102 mm)
Mower Deck Material	Stamped steel	Stamped steel	Stamped steel	Stamped steel	Stamped steel	Stamped steel	Stamped steel
Blade Engagement/PTO	Manual	Manual	Manual	Electric	Electric	Electric	Electric
Transmission							
Type	CVT/Automatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Turning Radius	18 in. (45 cm)	18 in. (45 cm)	18 in. (45 cm)	18 in. (45 cm)	18 in. (45 cm)	18 in. (45 cm)	18 in. (45 cm)
Electrical System							
Capacity	9 amp	9 amp	9 amp	9 amp	16 amp	16 amp	16 amp
12-Volt power Outlet	Not available	Not available	Not available	Optional accessory	Optional accessory	Optional accessory	Optional accessory
Fuel System							
Fuel Tank Capacity	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)	2.4 gal. (9.08 L)
Type of Fuel	Gasoline	Gasoline	Gasoline	Gasoline	Gasoline	Gasoline	Gasoline
Fuel Filter	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line	Replaceable, in fuel line
Travel Speed							
Forward	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)	0-5.5 mph (8.9 km/h)
Reverse	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)	0-3.2 mph (5.1 km/h)
Seat							
Height	11 in. (27.9 cm)	11 in. (27.9 cm)	15 in. (38.1 cm)	15 in. (38.1 cm)	15 in. (38.1 cm) w/lumbar adjustment	15 in. (38.1 cm) w/lumbar adjustment	15 in. (38.1 cm) w/lumbar adjustment
Tires							
Front	15x6-6	15x6-6	15x6-6	15x6-6	15x6-6	16x6.5-8	16x6.5-8
Rear	20x8.0-8	20x8.0-8	20x8.0-8/ 20x10-8	20x10-8	20x10-8	22x9.5-12	22x9.5-12
Dimensions							
Overall Length	68.75 in. (175 cm)	68.75 in. (175 cm)	68.75 in. (175 cm)/ 73.25 in. (186 cm)	69.5 in. (176.5 cm)	69.5 in. (176.5 cm)	76.5 in. (194 cm)	76.5 in. (194 cm)
Overall Width (deflector down)	54.9 in. (139 cm)	54.9 in. (139 cm)	54.9 in. (139 cm)	60.8 in. (154 cm)	60.8 in. (154 cm)	60.8 in. (154 cm)	68.5 in. (174 cm)
Height	42.5 in. (108 cm)	42.5 in. (108 cm)	44.5 in. (113 cm)	44.5 in. (113 cm)	44.5 in. (113 cm)	46.5 in. (118 cm)	46.5 in. (118 cm)
Net Weight (no fuel)	393 lb (178 kg)	421 lb (191 kg)	438 lb (199 kg)/ 456 lb (207 kg)	465 lb (211 kg)	483 lb (219 kg)	503 lb (228 kg)	523 lb (237 kg)
Miscellaneous							
Cruise Control	No	No	Yes	Yes	Yes	Yes	Yes
Front Bumper	Optional	Optional	Optional/ Standard	Optional	Standard	Standard	Standard
Steering Wheel	Standard, 12 in.	Standard, 12 in.	Standard, 12 in.	Standard, 12 in.	Deluxe, 14 in.	Deluxe, 14 in.	Deluxe, 14 in.
Storage Compartment	No	Storage, no cover	Storage w/cover	Storage w/cover	Storage w/cover	Storage w/cover	Storage w/cover
Bumper-to-Bumper Warranty**	2 years / 120 hours						

Upgrades are noted in green.

Attachments


EQUIPMENT	X500 SERIES	X300 SERIES	S240 SPORT	D100 SERIES
Two-Stage Snow Blowers				
44-in. Blower	X ^a	X	X	X
47-in. Blower	X ^a			
Blades				
44-in. Front Blade		X		
46-in. Front Blade			X	X
48-in. Front Blade	X			
Material Collection Systems				
2-bag (6.5-bu) Rear Bagger			X	X
2-bag (6.5-bu) Power Flow Rear Bagger				X ^a
2-bag (7-bu) Rear Bagger		X ^a		
2-bag (7-bu) Power Flow Rear Bagger	X	X ^a		
3-bag (14-bu) Power Flow Rear Bagger	X			
MC519 (19-bu) Power Flow Cart	X	X ^a		
Front Thatchers	X	X		
Rotary Tillers				
30-in. Mechanical Drive	X ^a			
42-in. Hydraulic Drive	X ^a			
Weather Enclosures and Canopy				
Weather Enclosure	X	X ^a	X	X
Canopy	X	X ^a	X	X
Rear Mounted Attachments				
Bucket Holder	X	X ^a	X	X
125 lb Electric Broadcast Spreader (Mounted)	X	X ^a		
Sprayers				
15 U.S. Gallon Tow-Behind	X	X	X	X
25 U.S. Gallon Tow-Behind	X	X	X	X

EQUIPMENT	X500 SERIES	X300 SERIES	S240 SPORT	D100 SERIES
45 U.S. Gallon Tow-Behind	X			
25 U.S. Gallon Mounted	X	X ^a		
Tow-Behind Equipment				
40-in. Thatcherator	X	X	X	X
36-in. Lawn Roller	X	X	X	X
40-in. Spiker Aerator	X	X	X	X
40-in. Aerator/Spreader	X	X	X	X
42-in. Lawn Sweeper	X	X	X	X
44-in. Lawn Sweeper	X	X	X	X
40-in. Plug Aerator	X	X	X	X
48-in. Plug Aerator	X			
125-, 130-, or 175-lb Broadcast Spreaders	X	X	X	X
Utility Carts**				
7P Utility Cart	X	X	X	X
8Y Utility Cart	X	X	X	X
10P Utility Cart	X	X	X	X
13 Utility Cart	X			
17P Utility Cart	X	X	X	X
**The loaded weight of the utility cart not to exceed the weight of the tractor and operator.				
Tractor Shovel 40-in.	X	X		

^aNot all attachments fit on all models within Series.



Right with you.
Your John Deere dealer.



Committed turf experts dig into what you need. Factory-trained service and parts professionals ensure that your equipment keeps working as hard as you do. So, let's get to work, together.



Models/items may not be exactly as shown

JohnDeere.com | JohnDeere.ca



This literature has been compiled for worldwide circulation. While general information, pictures and descriptions are provided, some illustrations and text may include finance, credit, insurance, product options and accessories NOT AVAILABLE in all regions. PLEASE CONTACT YOUR LOCAL DEALER FOR DETAILS. John Deere reserves the right to change specification, design and price of the products described in this literature without notice. John Deere's green and yellow color scheme, the leaping deer symbol, and JOHN DEERE are trademarks of Deere & Company.

DSTA68334 (16-09)



Nothing Runs Like a Deere™